
BRUSH SEALS

LAS5010, LAS5015, LAS5020, LAS5025 & LAS5030

FACE-FIXED

Hard wearing brush seals, suitable for various installations and door types. Nylon brush seals with aluminium carriers. Flexible and durable. Quick and easy installation.



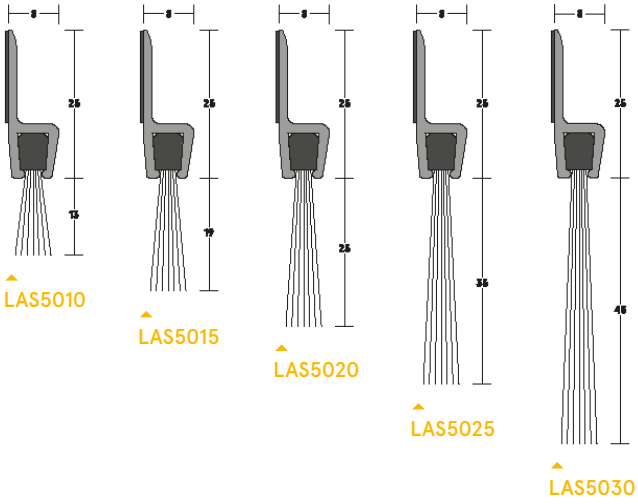

LAS5020

SYSTEM SPECIFICATIONS

Characteristics

- Contributes towards weather, draught, smoke, and light containment.

Location

- Head, jambs, threshold and meeting stiles of single and double swing doors and sliding doors.
- Head, jambs and threshold of revolving doors, up and over doors, and roller shutter doors.

Use with

- Any threshold plate.

Seal material

- Polypropylene brush filaments, UV stabilised.

Min/max gap size

- LAS5010: 10mm/13mm.
- LAS5015: 13mm/19mm.
- LAS5020: 19mm/25mm.
- LAS5025: 25mm/35mm.
- LAS5030: 35mm/45mm.

Standard lengths

- 1m and 2.1m. Other lengths to special order.

Fixing

- Heavy duty self-adhesive tape.
- Screw fixing recommended: screws not supplied.

Finishes

- Silver anodised aluminium with black brush filaments as standard.

T: +44 (0)1626 834252
E: mktg@lorientuk.com

LORIENT
ASSA ABLOY