
FIREMASTER FIRE + SMOKE RESISTANT LETTERPLATE


32dB

The Firemaster letterplate provides in excess of 30 minutes fire resistance and protection against cold smoke in line with BS 9999. It features a telescopic intumescent liner, making it suitable for a range of door thicknesses. A robust aluminium construction and nylon brush seals prevent vision through the letterplate, whilst also providing draught proofing.


30

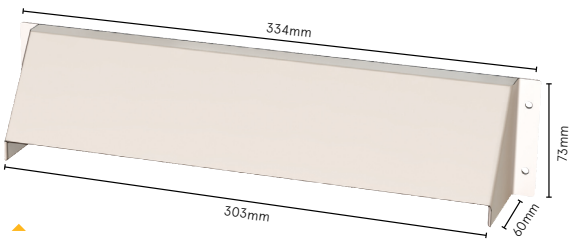

Security cowl
RJ 290X063C

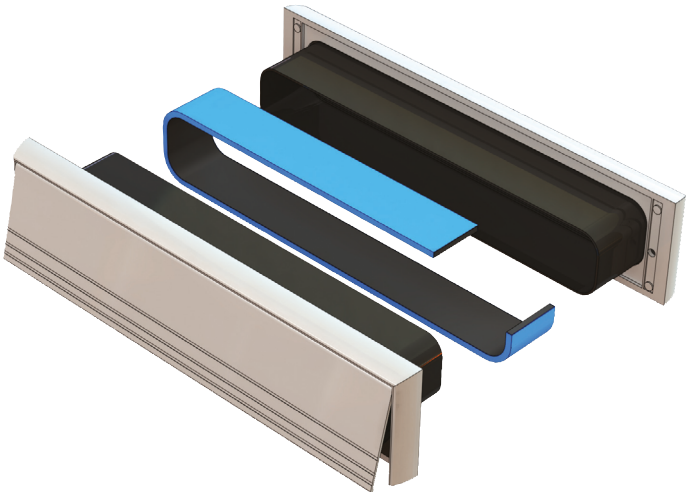

Firemaster fire + smoke resistant letterplate
RJS 29063

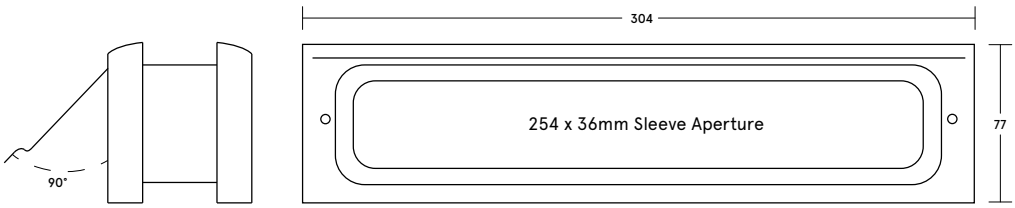

SYSTEM SPECIFICATIONS

Test evidence
- Fire: BS 476-20/22:1987.
- Smoke: BS 476-31.1:1983.
- Acoustic: BS EN ISO 717-1:2013 (up to Rw 32dB).
- Durability: 15,000 cycles.

Performance
- Can provide 30 minutes fire resistance.
- Provides protection against cold smoke in line with the requirements of BS 9999:2017 and Approved Document B.

Overall Size
- 304mm x 70mm.

Door thickness
- 40mm min.
- 70mm max.

Door aperture size
- 285mm x 55mm.

Seal material
- Graphite intumescent liner.

Finishes
- Silver anodised, polished silver or polished gold aluminium.

Use with
- A security cowl is available to prevent vision through the letterplate when open, and to inhibit manipulation of locks/bolts, tampering and attack from outside.

Certification
certifire
(CF219)

T: +44 (0)1626 834252
E: mktg@lorientuk.com

www.lorientgroup.com

LORIENT
ASSA ABLOY